


TRYKTABSDIAGRAM

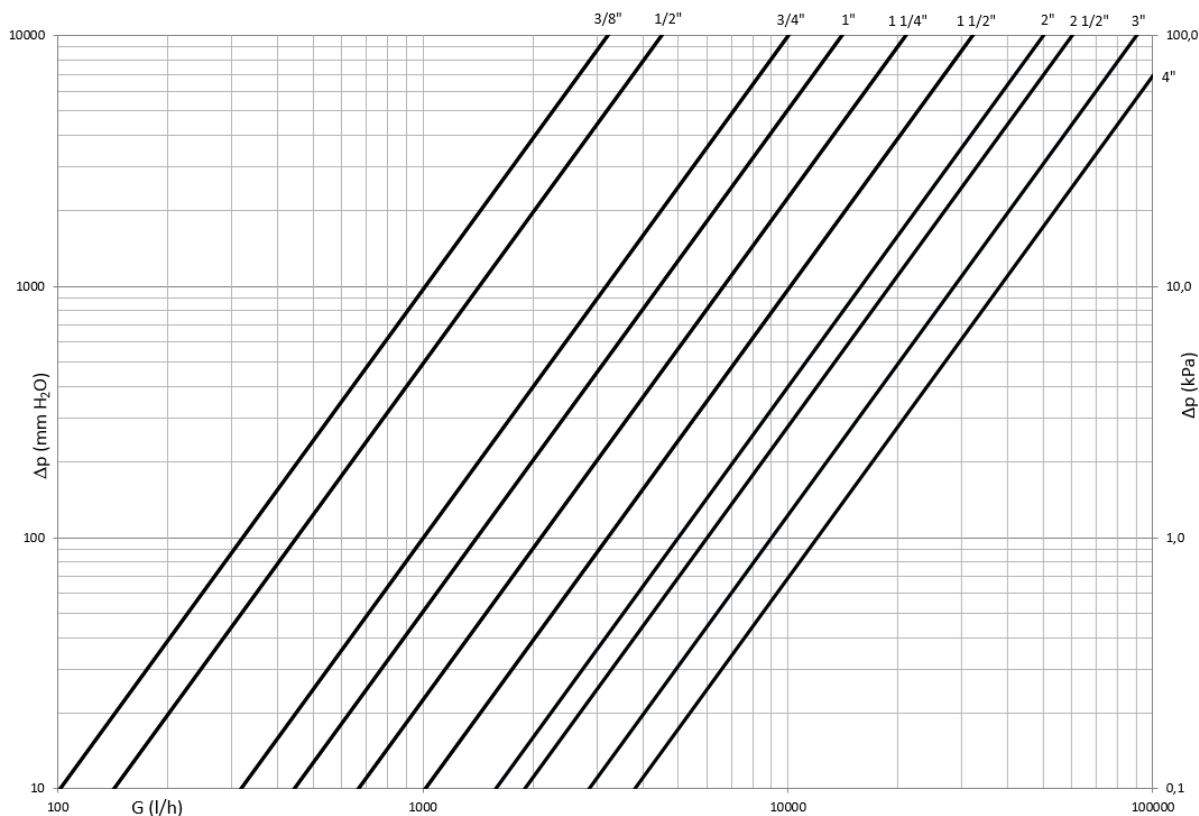

Dim.	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
Kv	3.2	4.5	10	14	21	32	50	60	90	120
PN	25	25	25	25	18	18	18	8	8	8

ANBEFALET DRIFTSTEMPERATUR / MAKSIMALTRYK

25 bar - 110°C - non shock (3/8" - 1")

18 bar - 110°C - non shock (1 1/4" - 2")

8 bar - 110°C - non shock (2 1/2" - 4")

Minimumstemperatur -20°C med maks. 30% glykol. Ingen frost.