

502PT, 503PT, 504PT - MANIFOLD MED NIPPELGEVIND



TEKNISKE SPECIFIKATIONER

MANIFOLD

Messing CW617N med TEA overflade

Centerafstand (CC)

50 mm

Maksimal driftstryk


10 bar

Maksimal driftstemperatur

100°C (212°F)


Gevind

ISO228

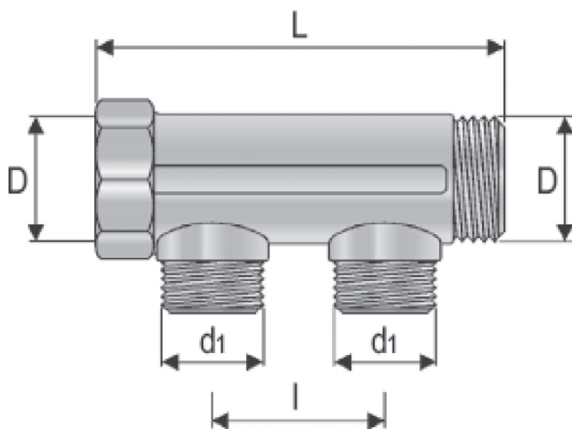

Dimensioner

Art.	L	D	d1	l
502	100	3/4"	1/2"	50
503	151	3/4"	1/2"	50
504	201	3/4"	1/2"	50

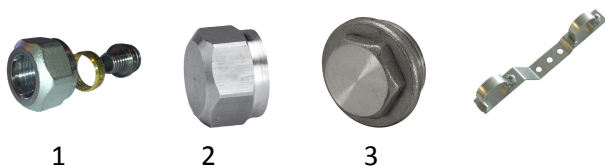

1

2

3

Art.	Pos.	
BI-219PT	1	Forskruningssæt 1/2" - 16/12
BI-220PT	1	Forskruningssæt 1/2" - 15/10
BI-227PT	2	Slutmuffe med TEA overflade
BI-231PT	3	Endeprop med TEA overflade
BI-7081	4	Vægbeslag til 3/4" manifold