Environmental Product Declaration





In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

MIXING KITS

from



EPD of multiple products, based on the average results of the product group. Series covered by this EPD: 7021C; 7021CD; 7002HF1; K7023.

Programme: The International EPD® System, <u>www.environdec.com</u>

Programme operator: EPD International AB

EPD registration number: S-P-12260
Publication date: 2024-03-12
Valid until: 2029-03-10

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com







Table of contents

Programme information	3
Product information	4
Company information	4
LCA information	5
System diagram	7
Modules declared	8
Content information	11
Environmental performance	13
List of acronyms	18
References	19





Programme information

Programme:	The International EPD® System						
	EPD International AB						
Address:	Box 210 60						
Address.	SE-100 31 Stockholm						
	Sweden						
Website:	www.environdec.com						
E-mail:	info@environdec.com						

Accountabilities for PCR, LCA and independent, third-party verification
Product Category Rules (PCR)
CEN standard EN 15804 serves as the Core Product Category Rules (PCR)
Product Category Rules (PCR): PCR 2019:14. Construction products. Version 1.3.2
PCR review was conducted by: technical committee of the International EPD® System
Life Cycle Assessment (LCA)
LCA accountability: LCA accountability: Studio Fieschi & soci s.r.l C.so Vittorio Emanuele II, 18 10123 Torino, IT - www.studiofieschi.it
Third-party verification
Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:
□ EPD verification by individual verifier
Third-party verifier: Luca Giacomello, Giacomello Technical and Environmental Consulting
Approved by: The International EPD® System
Procedure for follow-up of data during EPD validity involves third party verifier:
□ Yes ⊠ No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.





Product information

Product name: mixing kits, series 7021C; 7021CD; 7002HF1; K7023

<u>Note</u>: customizations of the product are identified by additional digits/letters, indicating non-substantial modification of the standard product.

Company information

Owner of the EPD:
Fratelli Pettinaroli S.p.A.
Via Pianelli, 38, 28017 San Maurizio d'Opaglio (NO) – Italy https://www.pettinaroli.com/

Contact:

Luca Rossi info@pettinaroli.com +39 0322 96217

Description of the organisation:

Founded in 1938, Fratelli Pettinaroli S.p.A. has always been synonymous with quality, reliability and innovation in the production of components for heating, air conditioning, plumbing and gas management systems. The company's mission is to provide customers with solutions that can be integrated into and managed by systems, constantly improving their performance. Its vision is "to design and develop equipment that makes buildings more reliable, efficient and sustainable". In order to establish itself on foreign markets, in the 1990s Pettinaroli embarked on an internationalisation process that resulted in a group of companies located between Europe and North America.

Today, more than 85 years after its foundation, Pettinaroli, still family-run, is a multinational group with over 300 employees and a constantly growing business, exporting its products to more than 60 countries around the world.

The company is ISO 9001, ISO 14001, ISO 50001 certified and has been awarded the EcoVadis Bronze Medal.

<u>Product identification and description:</u> Fratelli Pettinaroli produces several series of mixing kits for the circulation and mixing of fluids inside a heating system, made up of manifolds made of drawn brass rods and subsequently machined on machine tools, and a circulator that activates the fluid flow inside. The difference between the series lies in the various components, such as thermometers and valves, mounted on the main brass body manufactured by Fratelli Pettinaroli.

There is no variability within the range, except for the K7023 model, for which, the extremes of the range of the equipped manifolds were considered, i.e. the variant with the smallest manifold (lowest mass and number of outlets) and the variant with the largest manifold (highest mass and number of outlets).





The table below shows the configurations of the series included in this EPD

Series	Main brass body	Pump	Cables	Thermometer	Controls valves	Metal clamps
7021C	х	х	х			
7021CD	х	x	x			
7002HF1	x	x			x	
K7023 grande	x	x	x	x	x	x
K7023 piccola	х	x	х	x	x	x

<u>UN CPC code:</u> **43240** Taps, valves and similar appliances for pipes, boiler shells, tanks, vats or the like

Geographical scope: Europe

LCA information

<u>Declared unit:</u> 1 kg of mixing kit, packed and ready for shipment, based on the average results of the product group. The average environmental profile is calculated as the arithmetic mean of the extreme values of the group.

Product	Minimum profile	Maximum profile
Mixing kit	7021C	K7023 (biggest product)

The use of this approach means that the environmental profiles of all intermediate configurations of the products analyzed can also be considered included in the study.

Reference service life: 12 years

<u>Time representativeness:</u> All data about the product composition, manufacturing and distribution are referred to year 2022. Secondary data are the most recent available at the time of the study and are representative of the period 2018-2022.

Database(s) and LCA software used: Ecoinvent v.3.9.1, SimaPro v.9.5

Type of EPD:

Cradle to gate with options, modules C1–C4, module D and with optional modules (A1–A3 + C + D and module B).

Modules A4-A5 are excludes.

System boundaries:

System boundaries include the following processes:

- A1: production of brass semis and other components (eg pumps, thermometers, gaskets, etc.) necessary for the production of the mixing kit. This includes the processes applied to the semi-finished brass products upstream of the Fratelli Pettinaroli supply chain;
- A2: transport of raw materials (semi-finished products, purchase components) to Fratelli Pettinaroli's production site;
- A3: production of the mixing kits at Fratelli Pettinaroli's site. Production and consumption of
 electricity used at the plant. Production and consumption of fossil fuels (diesel) used for internal
 handling of products, management of waste (also derived from packaging) generated in the
 plant.





The processes included in this module are:

- o mechanical processing and washing;
- heat treatments;
- o galvanic treatments;assembly;
- o packaging of the finished product;
- B: the product is considered a EEE according to PCR 2019:14 and therefore modules B are included. However, the only impacts are related to the electricity consumption associated to the declared unit and the relevant market distribution.
- C1: dismantling or demolition process;
- C2: transport of waste to treatment/disposal points;
- C3: treatment of waste from preparation for recovery-recycling;
- C4: final disposal;

Module D: potential benefits and impacts related to recovery-reuse-recycling of materials and energy throughout the life cycle. In this module, the benefits and/or impacts related to, for example, the potential recycling of materials at the end of their life of the products under study are evaluated. The modelling of recovery-reuse-recycling benefits is carried out according to the requirements of EN 15804:2012 + A2:2019 § 6.4.3.3.

System boundaries do not include:

 Modules A4-A5 related to the distribution and installation phase of the product. Module A5 is considered included only for the balance of the biogenic carbon contained in the packaging;


- Impacts related to personnel (e.g. transport to and from the workplace, electricity and water consumption of offices, etc.);
- Impacts related to the production and transport of packaging materials of incoming semi-finished products.
- Input and output flows related to the production and end-of-life processes of infrastructure and capital goods¹.

¹ The exclusion of capital goods and infrastructure is limited to the main processes (foreground processes, modeled directly in the study). Impacts related to these processes could still be included in the backgruond data (e.g. Ecoinvent data).





System diagram:

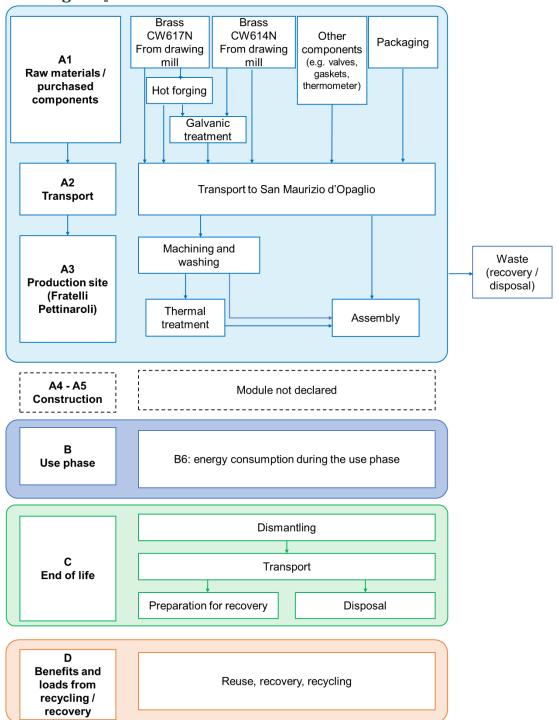

More information:

Brass CW617N and CW614N alloys contain around 60% copper and 40% zinc.

Both alloys contain lead in a concentration greater than 0,1%, substance listed in the "Candidate List of Substances of Very High Concern for authorization".

Module A5 is considered included only for the balance of the biogenic carbon contained in the packaging.

Modules C and D are modelled according to the distribution volumes of the mixing kits.





Modules declared

Geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

	Pr	oduct sta	ge	Const proces		Use stage						End of life stage				Resource recovery stage	
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling- potential
Module	A1	A2	А3	A4	A5	B1	B2	В3	B4	В5	В6	В7	C1	C2	C3	C4	D
Modules declared	х	х	х	ND	ND ²	х	х	х	х	х	х	х	х	х	х	х	х
Geography	GLO	GLO	IT	-	-	EUR	EUR	EUR	EUR	EUR	EUR	EUR	GLO	EUR	EUR	GLO	EUR
Specific data used		>90%		-	-	-	-	-	-	-	-	-	-	-	-	-	
Variation – products ³		+/- 12%		-	-	-	-	-	í	-	-	ľ	-	i	ı	-	
Variation – sites		0		-	-	-	-	-	-	-	-	-	-	-	-	-	

_

² Module A5 is considered only for the balance of the biogenic carbon contained in the packaging

³ In an EPD of multiple products, the difference (in %) between the declared GWP-GHG result, and the product with GWP-GHG results furthest away from the declared results, for modules A1-A3 shall be reported in the EPD. Variations above 10% are allowed, if justified in the LCA report and the EPD declares the variation of each impact indicator results for which the variation is above 10%.





<u>Cut-off</u>: The cut-off rules contained in EN 15804:2012 + A2:2019 §6.3.6 and PCR 2019:14 §4.4 apply. As their total contribution is less than 1% of the impacts of the reference module, the following contributions were not included in the model:

- Pad printing and pad printing inks;
- Label and test sheet associated with the product BoM;
- VOC emissions recorded by the company;
- Company waste below 50 kg/year;

Allocation rules:

In the case of multifunctional situations, i.e. where systems generate several products, the allocation rules in PCR 2019:14 apply.

Relevant allocations were applied in modules A1 and A3.

- A1: economic allocation was applied to the brass from the market in order to characterize the impacts related to the pre-consumer scrap used as raw material in Fratelli Pettinaroli's supply chain;
- A3: mass allocation per kg of finished product of the plant energy / fuel consumption and waste generation;
- A3: economic allocation related to the scrap (co-product) produced per kg of manifold was applied to the processes under direct control of Fratelli Pettinaroli.

<u>Brass</u>: brass is the main material the mixing kits are made of. This material enters Fratelli Pettinaroli's supply chain as pre-consumer waste. A "market brass" flow consisting of primary material and post-consumer scrap was therefore modelled on the basis of material flow analyses of copper and zinc, the two main components of the brass alloy. The alloy composition and the energy consumption associated with market brass were estimated based on primary data obtained from Fratelli Pettinaroli's direct suppliers.

<u>Electricity mix</u>: The electricity used in the production process (step A1-A3) was modelled using the National Residual Mix provided by the AIB (Association of Issuing Bodies), data year 2022. The GWP-GHG of the electricity mix used to model module A3 is 0,589 kg CO2 eq./kWh.

The electricity used during the RSL of the product (B6) was modelled according to the residual national mix of the relevant Countries.

Assumptions for the use phase (B6)

The use phase was modelled according to the technical data shared by the producer through technical datasheets and published EPDs. The reference service life declared by the manufacturer is 12 year for all the pumps included in the study. The total electricity consumption of the kits during their RSL considers the market distribution of the product.

The use profile of the mixing kits included in the EPD is shown below.

Series	Pump (BoM)	Total electricity consumption (Wh/y)	Average working hours / year (h/y)	Reference service life (years)	Average power consumption (W)	Total power consumption in 12 years (kWh)
7021C	Pompa UPM3 auto 15-70/130 (COMPOSITO)	281250	8760	12	32,1	3375
7021CD	Pompa UPM3 auto 15-70/130 (COMPOSITO)	281250	8760	12	32,1	3375
7002HF1	Pompa UPM2 15-20/130 (GHISA)	122640	8760	12	14,0	1472
K7023 piccola	Pompa UPM3 auto 15-50/130 (GHISA)	243750	8760	12	27,8	2925
K7023 grande	Pompa UPM3 auto 15-70/130 (COMPOSITO)	281250	8760	12	32,1	3375





The impacts arising from the use phase are then referred to the declared unit. Assumptions for the end of life scenario of the rpoduct (modules C1-C4)

Module C1: The process of dismantling the collector is mainly associated with the process of dismantling the building in which it is contained. It is assumed that the energy source used for this purpose is diesel and that the average energy consumption in this phase is 0.07 MJ/kg.

Module C2: Transport of waste to treatment/disposal points. An average transport scenario to collection, recovery and disposal sites of 50 km traveled by land. For transport, a 16-32 ton lorry, Euro4 related to the relevant geography was used.

Modules C3 - C4: waste preparation for recovery-recycling and final disposal. The following considerations apply:

- The product is broken down into its main constituent materials (metal, plastic etc.) and, for each of these, specific end-of-life scenarios are applied that distinguish between recycling, energy recovery, incineration and landfill disposal;
- The share of material sent for recycling is derived from the Product Environmental Footprint (PEF);
- The shares of materials sent for energy recovery, incineration and landfilling are derived from Eurostat waste treatment statistics for European countries, while for non-EU countries the What A Waste Global Database was used:
- Given the nature of the polymeric materials obtainable from disassembly, it is assumed that EoW status is reached after incineration with energy recovery;
- It is assumed that all the purchased components are disposed of as mixed waste.

Assumptions for module D: module D is set to 0 for metals.





-Content information

1 kg of average mixing kit, packed

Product components	Weight, kg	Post-consumer material, weight-%	Biogenic material, weight-% and kg C/kg		
Brass CW617N - extruded	0,354	10,7%	0,0%		
Brass CW614N - extruded	0,329	9,9%	0,0%		
Synthetic rubber	0,081	0,0%	0,0%		
Copper	0,041	0,0%	0,0%		
Aluminium	0,036	0,0%	0,0%		
Galvanised steel	0,035	0,0%	0,0%		
Magneti	0,033	0,0%	0,0%		
ABS + POM	0,026	0,0%	0,0%		
Steel	0,021	0,0%	0,0%		
PVC	0,011	0,0%	0,0%		
Stainless steel	0,008	0,0%	0,0%		
Electronics	0,004	0,0%	0,0%		
Ceramics	0,004	0,0%	0,0%		
Ethyl acetate	0,004	0,0%	0,0%		
PP	0,004	0,0%	0,0%		
Plastics GF	0,003	0,0%	0,0%		
Nylon	0,003	0,0%	0,0%		
Galvanised iron	0,002	0,0%	0,0%		
Total	1,00	20,5%	0,0%		
Packaging materials	Weight, kg	Weight-% (versus the product)	Weight biogenic carbon, kg C/kg		
Cardboard	0,111	11,1%	0,047		





Wood	0,104	10,4%	0,004
LDPE	0,005	0,5%	0,000
Paper	0,002	0,2%	0.004
Adhesive paper	0,000	0,0%	0,001
Total	0,223	22,3%	0,052

Packaging materials	Weight, kg	Weight-% (versus the product)	Weight biogenic carbon, kg C/kg
Cardboard	0,111	11,1%	0,047
Paper	0,002	0,2%	0.001
Adhesive paper	0,0005	0,05%	0,001
LDPE	0,005	0,5%	0,000
Wood	0,104	10,4%	0,004
Total	0,223	22,3%	0,052

Hazardous substances

Declared products contain substances listed in the "Candidate List of Substances of Very High Concern for authorization" in a concentration greater than 0,1%:

Name of substance	CAS#	EC#
Lead	/439-92-1	231-100-4

Lead is contained in all the product made of the following copper-zinc alloy:

- EN12164 CW614N DW
- EN12165 CW617N DW





Environmental performance

Results for 1 kg of average mixing kit, packed

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks

Mandatory impact category indicators according to EN 15804

	Results for declared unit														
Indicator	Unit	A1-A3	B1	B2	В3	В4	B5	В6	В7	C1	C2	C3	C4	D	Delta
GWP- fossil	kg CO ₂ eq.	7,41E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,51E+02	0,00E+00	6,69E-03	7,64E-03	3,74E-02	5,72E-02	-1,53E-02	
GWP- biogenic	kg CO ₂ eq.	7,75E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,96E+00	0,00E+00	5,37E-07	6,13E-07	1,13E-02	2,51E-03	-1,60E-05	
GWP- luluc	kg CO ₂ eq.	1,08E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,11E-01	0,00E+00	2,68E-07	1,46E-07	4,98E-06	3,11E-05	-8,92E-06	
GWP- total	kg CO ₂ eq.	7,50E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,54E+02	0,00E+00	6,69E-03	7,64E-03	4,87E-02	5,98E-02	-1,53E-02	+/- 12,6%
ODP	kg CFC 11 eq.	1,24E-07	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,06E-06	0,00E+00	1,03E-10	1,61E-10	1,11E-10	2,64E-10	-3,39E-10	+/- 13,0%
AP	mol H ⁺ eq.	2,15E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,88E-01	0,00E+00	6,26E-05	9,39E-06	3,09E-05	8,75E-05	-3,59E-05	
EP- freshwater	kg P eq.	1,15E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,68E-02	0,00E+00	5,59E-09	5,87E-09	3,44E-07	8,25E-07	-3,27E-07	
EP- marine	kg N eq.	1,73E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,04E-01	0,00E+00	2,94E-05	2,33E-06	2,26E-05	3,52E-05	-7,40E-06	+/- 22,4%
EP- terrestrial	mol N eq.	1,89E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,42E+00	0,00E+00	3,20E-04	2,27E-05	1,28E-04	3,36E-04	-8,28E-05	





POCP	kg NMVOC eq.	4,62E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,91E-01	0,00E+00	7,68E-05	6,52E-06	3,47E-05	8,73E-05	-2,08E-05	
ADP- minerals& metals*	kg Sb eq.	2,89E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,49E-06	0,00E+00	2,75E-10	2,57E-10	1,38E-09	3,39E-08	-3,71E-09	+/- 12,8%
ADP- fossil*	MJ	9,70E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,61E+03	0,00E+00	8,60E-02	9,93E-02	5,61E-02	1,77E-01	-2,60E-01	+/- 11,3%
WDP*	m ³	4,73E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,53E+01	0,00E+00	1,09E-04	9,10E-05	8,01E-04	3,70E-03	-4,33E-03	
Ac	Acronyms GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption														

Additional mandatory and voluntary impact category indicators

	Results for declared unit														
Indicator	Unit	A1-A3	B1	B2	В3	В4	В5	В6	В7	C1	C2	С3	C4	D	Delta
GWP- GHG⁴	kg CO₂ eq.	7,28E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,50E+02	0,00E+00	6,54E-03	7,47E-03	4,58E-02	5,83E-02	-1,48E-02	+/- 12,4%

^{*} Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

⁴ This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO₂ is set to zero.





Resource use indicators

Results for declared unit														
Indicator	Unit	A1-A3	B1	B2	В3	B4	B5	В6	В7	C1	C2	С3	C4	D
PERE*	MJ	1,46E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,43E+03	0,00E+00	1,68E-04	2,61E-04	2,21E-02	1,92E-02	-4,69E-02
PERM*	MJ	2,15E+00	0,00E+00	0,00E+00	0,00E+00									
PERT	MJ	1,52E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,43E+03	0,00E+00	1,68E-04	2,61E-04	2,21E-02	1,92E-02	-4,69E-02
PENRE*	MJ	9,26E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,61E+03	0,00E+00	8,60E-02	9,93E-02	2,32E+00	1,04E+00	-1,93E-01
PENRM*	MJ	4,42E+00	0,00E+00	-2,27E+00	-8,68E-01	-6,64E-02								
PENRT	MJ	9,70E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,61E+03	0,00E+00	8,60E-02	9,93E-02	5,61E-02	1,77E-01	-2,60E-01
SM	kg	1,36E+00	0,00E+00	0,00E+00	0,00E+00									
RSF	MJ	0,00E+00	0,00E+00	0,00E+00										
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00										
FW	m³	1,16E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,69E+00	0,00E+00	4,05E-06	4,12E-06	6,91E-05	1,45E-04	-1,77E-04

Acronyms

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

^{*}Primary energy contained in the packaging material is not accounted for and is considered lost.





Waste indicators

	Results for declared unit													
Indicator	Unit	A1-A3	B1	B2	В3	В4	В5	В6	В7	C1	C2	C3	C4	D
Hazardous waste disposed*	kg	0,00E+00												
Non- hazardous waste disposed*	kg	0,00E+00												
Radioactive waste disposed**	kg	0,00E+00												

^{*}Hazardous waste disposed and Non-hazardous waste disposed indicators are set to 0 because all the relevant waste treatment processes are included within the system boundaries.

^{**}Radioactive waste is considered not relevant within the value chains included in the study





Output flow indicators

						Results	for declared	unit						
Indicator	Unit	A1-A3	B1	B2	В3	B4	В5	В6	В7	C1	C2	C3	C4	D
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Material for recycling	kg	4,17E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,91E-01	0,00E+00	0,00E+00
Materials for energy recovery	kg	2,95E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,47E-01	5,84E-03	0,00E+00





List of acronyms

ABS Acrilonitrile-butadiene-stirene

ADP Abiotic Depletion Potential

AP Acidification Potential

BoM Bill of Materials

EEE Electrical and electronic equipment

EP Eutrophication Potential

EPD Environmental Product Declaration

EoL End of Life

EoW End of Waste

GWP Global Warming Potential

IES International EPD® System

LCA Life Cycle Assessment

LCI Life Cycle Inventory

LCIA Life Cycle Impact Assessment

LDPE Low-density polyethylene

NBR Nitrile butadiene rubber

ODP Ozone Depletion Potential

PCR Product Category Rules

POCP Photochemical Ozone Creation Potential

POFP Photochemical Ozone Formation Potential

POM Polyoxymethylene

PVC Polyvinyl chloride

RSL Reference Service Life





References

- EN 15804:2012 + A2:2019 + AC, Sustainability of buildings Environmental product declarations Framework rules for development by product category
- International EPD System, General Programme Instructions, versione 4.0
- International EPD System, PCR 2019:14 Construction products versione 1.3.2
- ISO 14025:2010 Environmental labels and declarations Type III environmental declarations Principles and procedures;
- ISO 14040:2021 Environmental Management Life Cycle Assessment Principles and Framework;
- ISO 14044:2021 Environmental Management Life Cycle Assessment Principles and Requirements and Guidelines.
- Association of Issuing Bodies, European Residual Mixes 2021
- PlasticsEurope, Eco-profiles and Environmental Product Declarations of the European Plastics Manufacturers, April 2014, December 2016: update water balance
- European Commission, 2021, Recommendation 2021/2279 on the use of the Environmental Footprint methods to measure and communicate the life cycle environmental performance of products and organisations;
- Studio Fieschi & soci, 2022, Carbon Footprint of copper-nickel surface treatment process.
- International Copper Study Group, The World Copper Factbook 2022
- International Zinc Association, 2022, ZINC RECYCLING Stocks + Flows
- Gervasio, H., Dimova, S., 2018, *Model for Life Cycle Assessment (LCA) of buildings*, EC JRC technical reports
- Eurostat waste database https://ec.europa.eu/eurostat/web/waste/data/database

